

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 July 2004 (15.07.2004)

PCT

(10) International Publication Number
WO 2004/059051 A1


- (51) International Patent Classification⁷: **D01G 1/08**,
G06F 19/00
- (21) International Application Number:
PCT/US2003/040020
- (22) International Filing Date:
12 December 2003 (12.12.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/434,051 17 December 2002 (17.12.2002) US
- (71) Applicant (for all designated States except US): **E.I. DU PONT DE NEMOURS AND COMPANY** [US/US]; 1007 Market Street, Wilmington, DE 19898 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **SCOTT, Gregory**,

James [US/US]; 41 Kings Grant Road, Hockessin, DE 19707 (US). **PERROTTO, Joseph, Anthony** [US/US]; 136 Pine Hill Road, Landenberg, PA 19350 (US). **SIMMONDS, Glen, Edward** [US/US]; 139 Fernwood Drive, Avondale, PA 19311 (US). **BRYSON, Richard, Davis** [US/US]; 110 Carriage Lane, Elkton, MD 21921 (US). **CORCORAN, William, Robert** [US/US]; 108 Manor Drive, Kennett Square, PA 19348 (US). **WALKER, William, Charles** [US/US]; 16 West 38th Street, Wilmington, DE 19802 (US).

- (74) Agent: **MEDWICK, George, M.**; E. I. DU PONT DE NEMOURS AND COMPANY, LEGAL PATENT RECORDS CENTER, 4417 Lancaster Pike, Wilmington, DE 19805 (US).
- (81) Designated States (national): CN, JP, KR, US.
- (84) Designated States (regional): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

[Continued on next page]

(54) Title: METHOD FOR CONTROL OF YARN PROCESSING EQUIPMENT

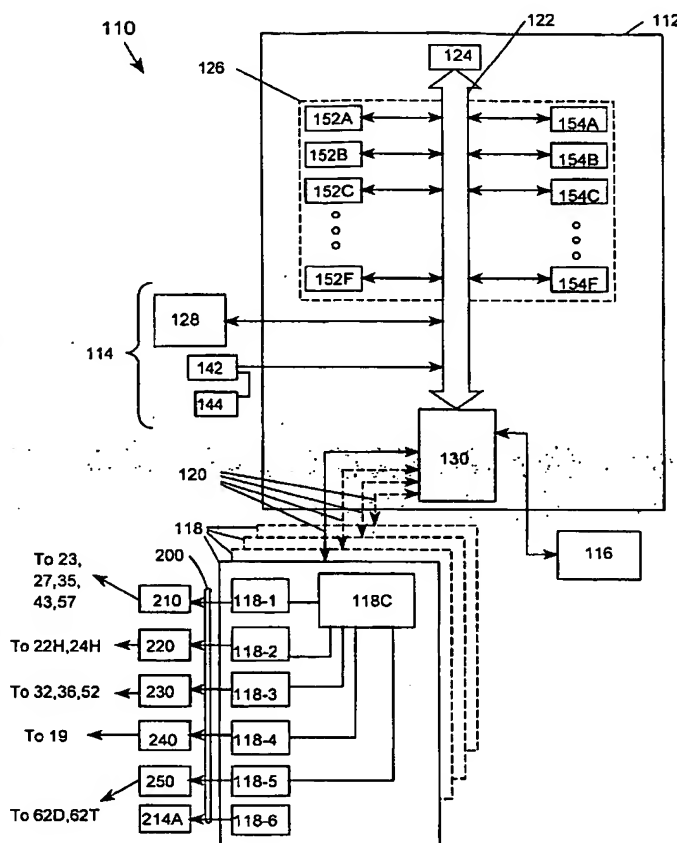

(57) Abstract: A method for starting or stopping each of at least two separately controllable roll-sets (22, 26, 34, 56) used for processing a yarn (Y) in a stretch-break process, each roll-set comprising at least two rolls, the method is characterized by the step of each roll-set, changing the speed of each roll from an initial condition to a steady state condition in accordance with a predetermined sequence and in coordination with a change in speed of at least one of the other rolls, such that simultaneous complete breakage of a yarn (Y) being processed in a stretch-break process is minimized.